



TECHNICAL SPECIFICATIONS


Motor type	24 Volts DC or 12 Volts DC
Maximum strength	6000 N in push / 4000 N in pull
Strokes	from 35mm to 65mm (pitch 2mm)
Speed	up to 11 mm/sec. unloaded
Protection grade	IP43
Operating temperatures	+5° to +40°
Duty cycle	10% (2 mn operation / 18 mn rest)
Colour	black

Options :


Fixing type	various models available with or without clevis
Mechanical safety	Push Only
Synchronisation / memory function	with hall effect sensors

PERFORMANCES

Speed / Load

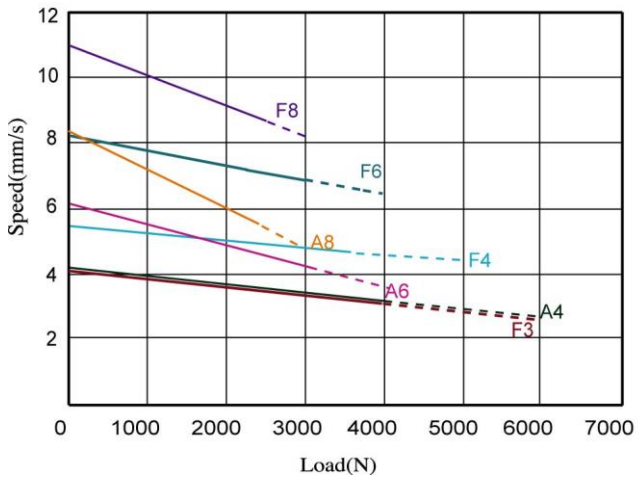

Current / Load

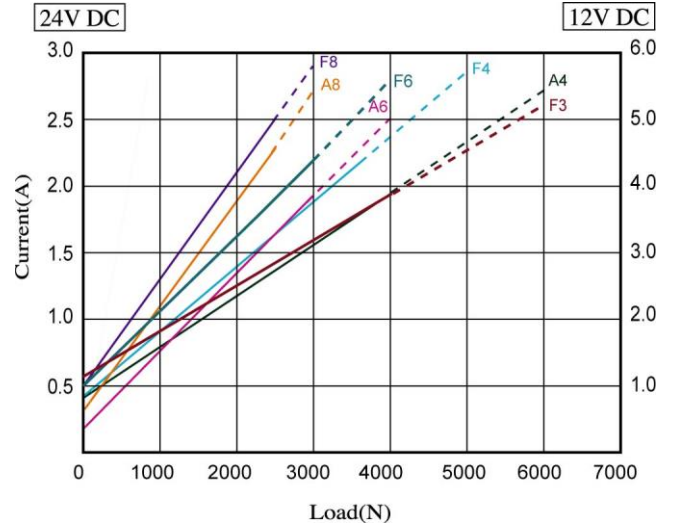

STANDARD DIMENSIONS

