


Battery-box DUOBOX

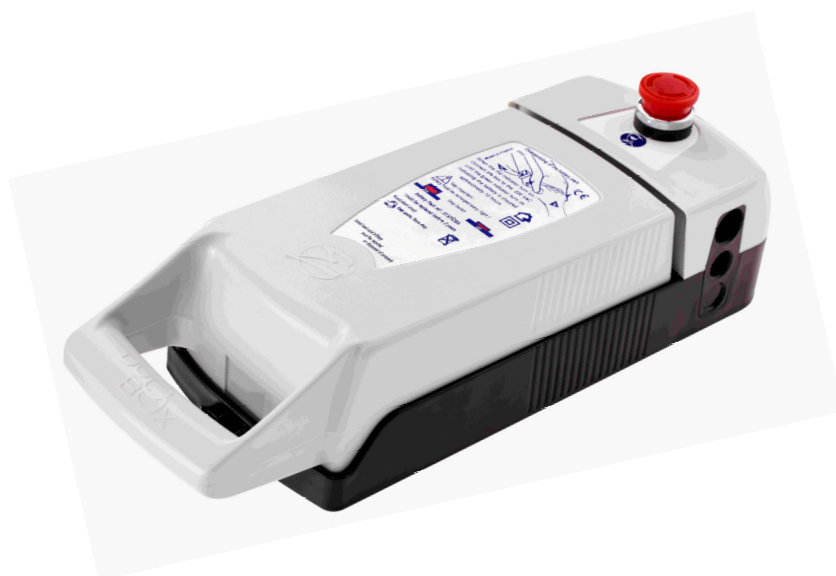

TECHNICAL SPECIFICATIONS

Input voltage	220-240 VAC – 50 / 60Hz
Output voltage	24 VDC
Power / current	maximum 7 A at 24 VDC
Actuator connections	from 1 to 2
Control connection	1
Built-in charger function	visual alarm in case of low voltage (red LED)
Emergency lowering function	button on front panel
Protection grade	IP54
Batteries	2 x batteries 12V - 4 A/H
Power cord	removable
Mounting	fixing holes for screwing
Colour	-front housing RAL 7035 (light grey) -back housing RAL 7016 (dark grey)
Duty cycle	10% (2 mn operation / 18 mn rest)

Options :

Batteries additional recharge	on external charger
Replacement of empty battery-pack	additional battery-pack