




TECHNICAL SPECIFICATIONS


Motor type	24 Volts DC
Maximum strength	1500 N in push / 1500 N in pull
Maximum current	2.3 A under 29 V DC at full load 1500 N
Maximum stroke	333 mm
Maximum speed	-at no load : 55 mm/sec. -at full load 1500 N: 49 mm/sec.
Power supply	SMPS types TES1 / TES2 / TES3 / TES4
Control compatibility	H2G / H3B / HS2 / HZ1 / HZ2
Colour	Black motor / grey tube
Operating temperatures	0° to +65°
Duty cycle	10% (2 mn operation/ 18 mn rest)

PERFORMANCES


Speed / Load

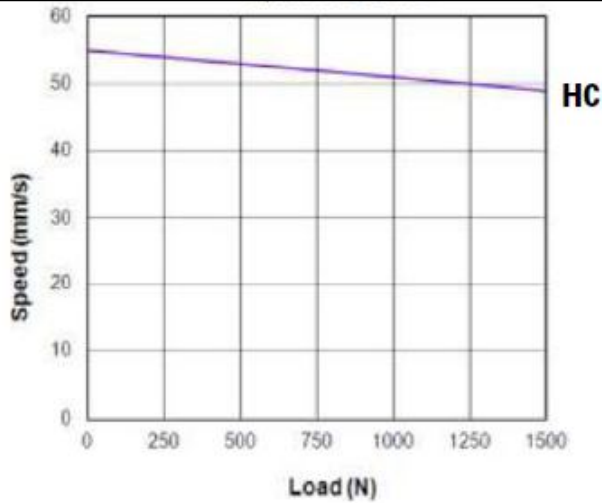

Current / Load

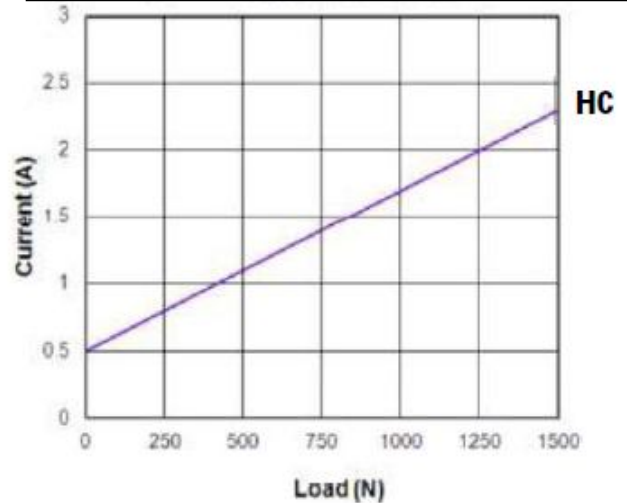

STANDARD DIMENSIONS

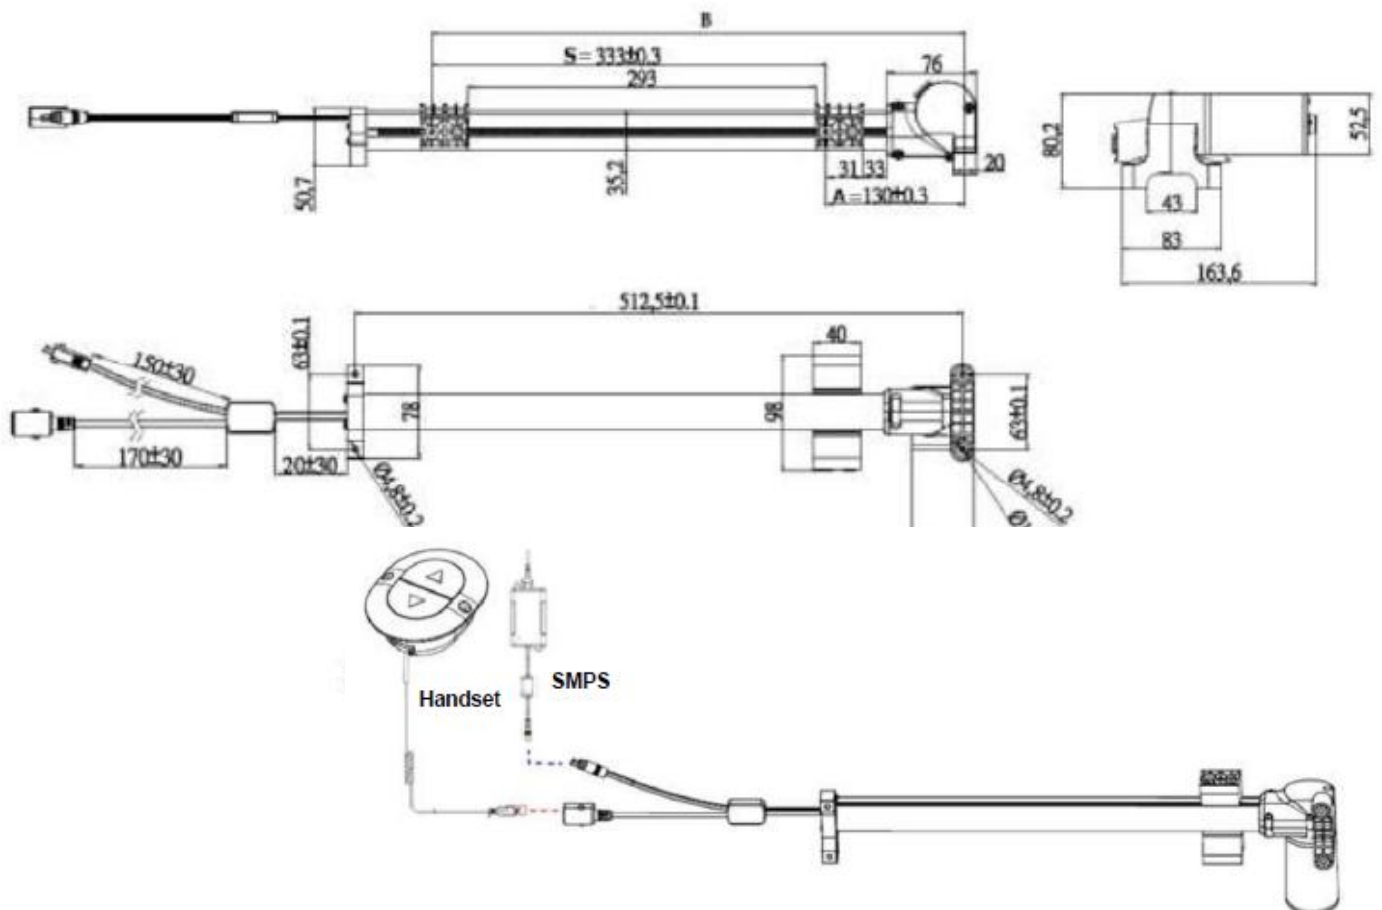

Stroke (S)	$\cong 333\text{mm}$
Retracted length (A)	$\cong 130\text{mm}$
Extended length (B)	$B = A + S$