



TECHNICAL SPECIFICATIONS


Motor type	24 Volts DC or 12 Volts DC
Maximum strength	6000 N in push / 4000 N in pull
Strokes	standard or tailor-made
Speed	standard: 4.2 mm/sec.
Protection grade	IP43
Operating temperatures	+5° to +40°
Duty cycle	10% (2 mn operation/ 18 mn rest)
Compatibility	control boxes TB / TSE / TST / TSW / CBP / NOVOMAT
Colour	black

Options :


Speed	maximum 16.6 mm / sec. unloaded
Dimensions	stroke and retracted length upon request
Mechanical safety	Push Only
Fixing type	various models with or without clevis (Metal / Plastic)
Direction of fixing clevis	0° or 90°
Synchronisation / Memory function	with hall effect sensors

PERFORMANCES

Speed / Load

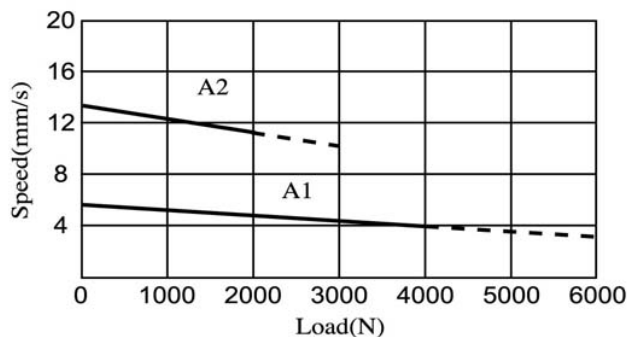

Current / Load

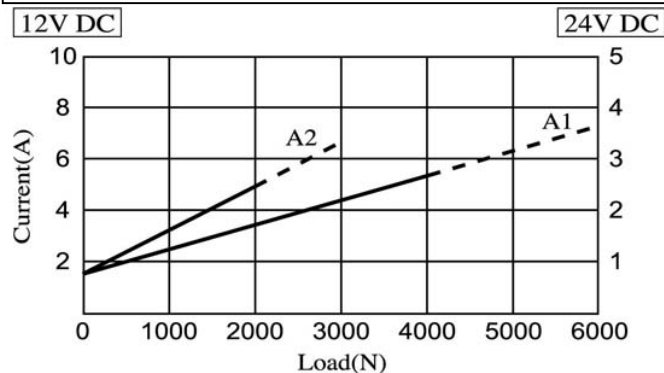

STANDARD DIMENSIONS

Stroke	50mm	100mm	150mm	200mm	250mm	300mm
Retracted length	238mm	278mm	338mm	388mm	448mm	498mm
Extended length	288mm	378mm	488mm	588mm	698mm	798mm

