

Linear actuator V80E




TECHNICAL SPECIFICATIONS

Motor type	24 Volts DC or 12 Volts DC
Maximum strength	8000 N in push / 6000 N in pull
Strokes	standard or tailor-made
Speed	maximum 16.5 mm / sec. unloaded
Protection grade	IP54
Tubes material	Aluminium
Operating temperatures	+5° to +40°
Duty cycle	10% (2 mn operation / 18 mn rest)
Colour	RAL 7035 (light grey)

Options :

Emergency lowering function	mechanical release QR or MR
Protection grade	IP65 / IP66
Mechanical safety	-Push Only -safety nut
Fixing type	various models with or without clevis
Direction of fixing clevis	0° or 90°
Synchronisation / Memory function	with hall effect sensors

PERFORMANCES

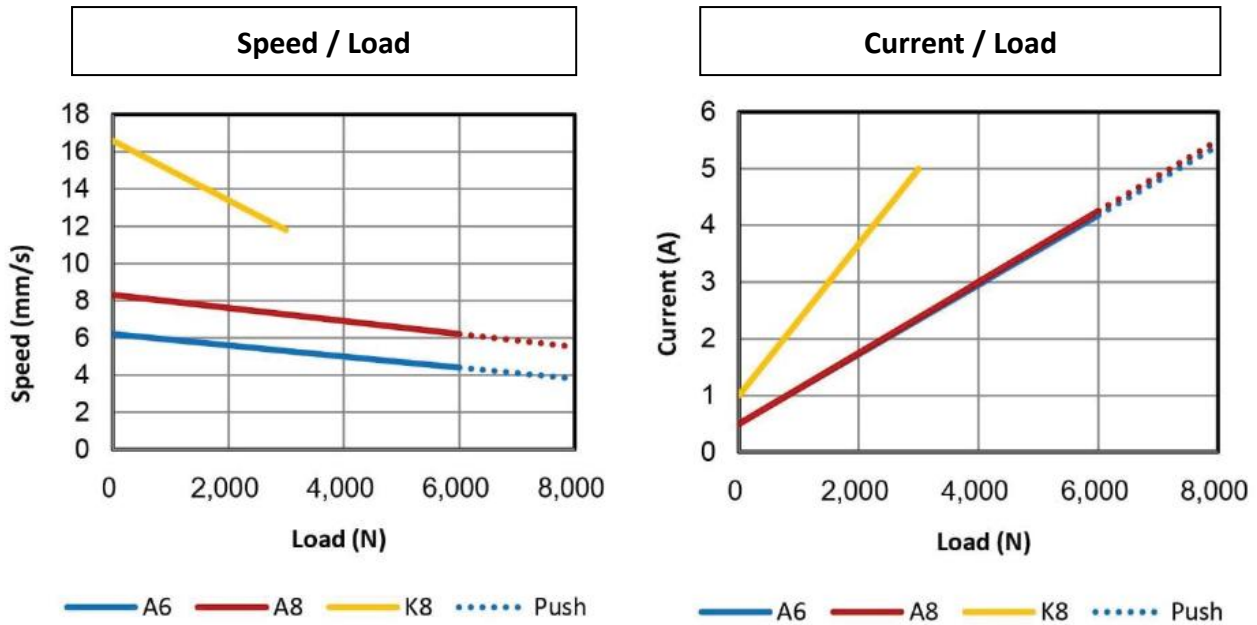

STANDARD DIMENSIONS

Stroke (mm)	100	150	200	250	300	350	400
Retracted length (mm)	300	350	400	450	500	550	600
Extended length (mm)	400	500	600	700	800	900	1000

