



TECHNICAL SPECIFICATIONS


Input Power supply	100 VAC to 240 VAC
Switch Mode Power Supply	internal SMPS
Protection grade	IP 43
Thrust capability	version 2 x 4 500 N
Speed	5 mm / sec. unloaded
Strokes	standard 87 mm / 69 mm
Installation dimension	581 mm
Emergency lowering reset	by 2 x 9 V batteries
Colour	Black
Control types	compatible with all models including radiofrequency
Operation temperature	+5° to +40°
Protection class	Class II
Duty cycle	2 mn operation / 18mn rest (10%)

Options :

Switch Mode Power Supply	external SMPS box
Colour	Light grey (RAL 7035)


PERFORMANCES

SPEED / LOAD

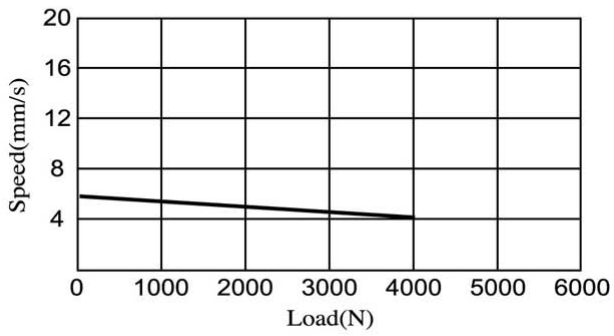


CURRENT / LOAD

24V DC

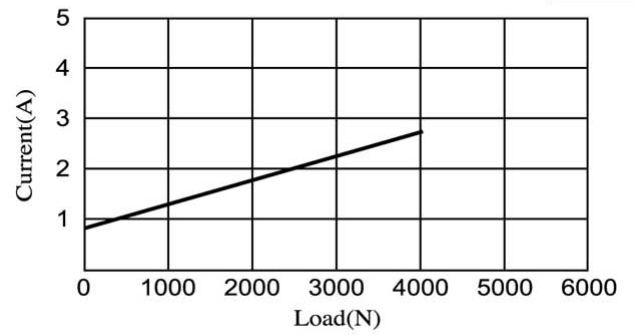

DIMENSIONS

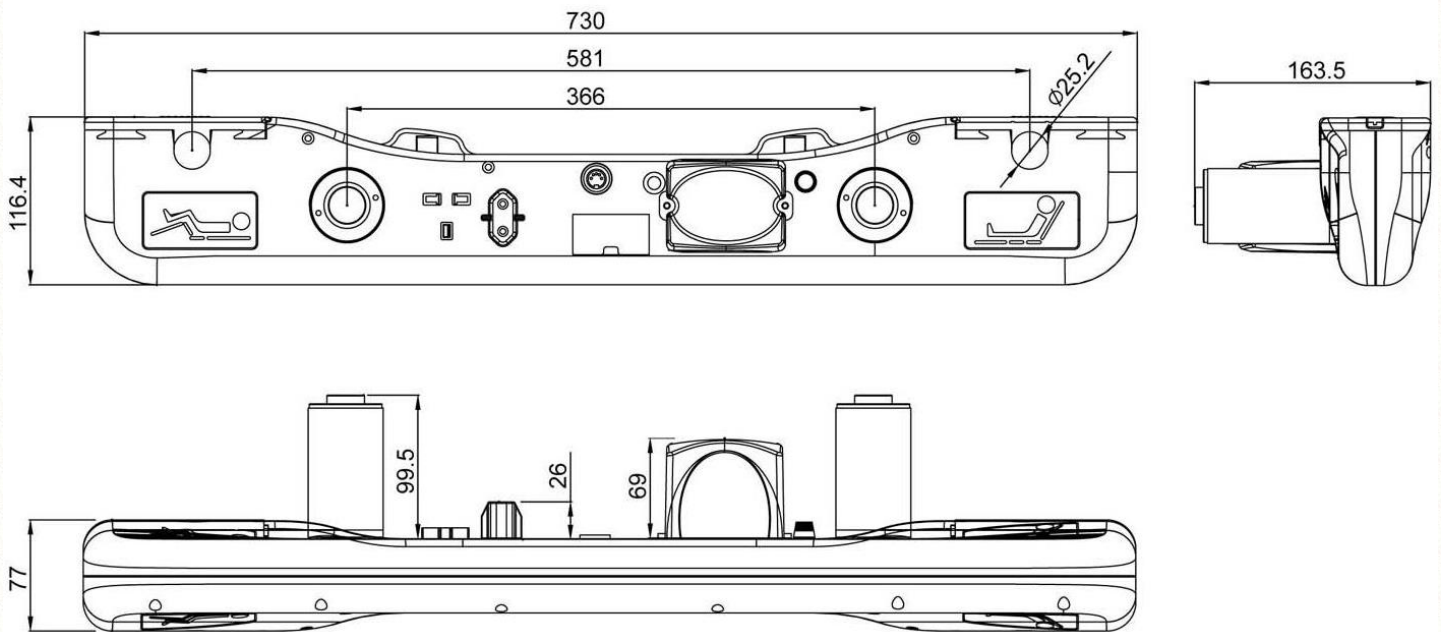

Unit = mm