

Switch Mode Power Supply TES




TECHNICAL SPECIFICATIONS

Input voltage	100 to 240 VAC / 50-60 Hz
Output voltage	29 VDC (27.6-30.4 VDC)
Power / current	2 A nominal
Electrical protection	protection against over-current (input / output) protection against over-voltage (output) protection against short-circuit protection against over-load
Consumption in stand-by mode	0.3~0.4 W
Insulation resistor	100 Mohms or above at 500 VDC
Protection grade	IP42
Leak current	< 0.75 mA at 230 VAC full load
Protection class	Class II
Operating temperatures	0° to +40°
Duty cycle	10% (2 mn operation / 18 mn rest)
Colour	black (RAL 7001)

Options :

Fixing type	adhesive brackets for fixing on frame
Emergency lowering function	by 2 x 9V batteries on type TES2

DIMENSIONS OF TES1

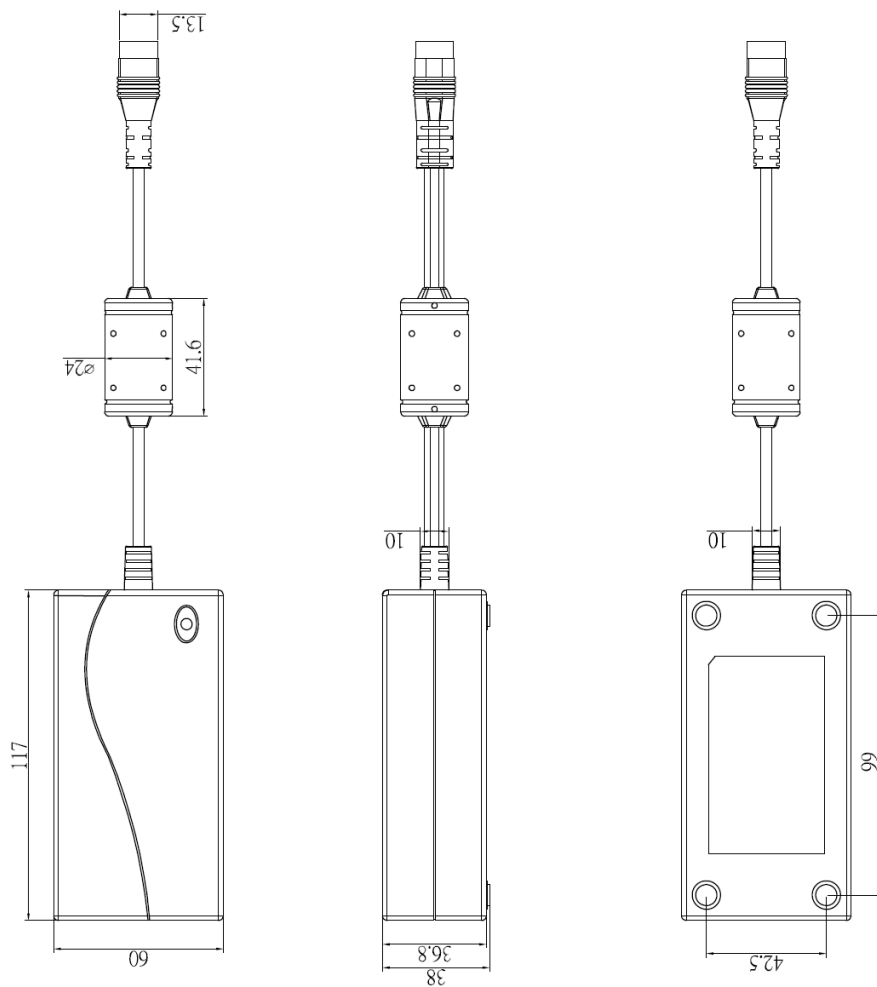

DIMENSIONS OF TES2

