

Linear actuator V100



TECHNICAL SPECIFICATIONS


Motor type	24 Volts DC
Maximum strength	10000 N in push / 6000 N in pull
Strokes	standard or tailor-made
Speed	standard : 5 mm / sec.
Protection grade	IP54
Operating temperatures	+5° to +40°
Duty cycle	10% (2 mn operating / 18 mn rest)
Compatibility	control boxes CBP / VEOBOX
Tube material	-inner tube : Stainless steel -outer tube : Aluminium
Colour	RAL 7035 (light grey)

Options :


Speed	maximum 11 mm / sec. unloaded
Emergency lowering function	mechanical release QR / MR
Protection grade	IP65 / IP66
Mechanical safety	-Push Only -safety nut
Fixing type	various models with or without clevis
Direction of fixing clevis	0° or 90°

PERFORMANCES

Speed / Load

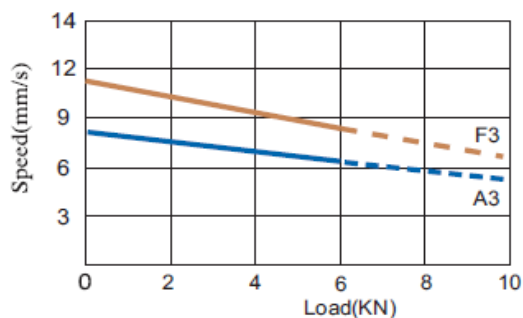

Current/ Load

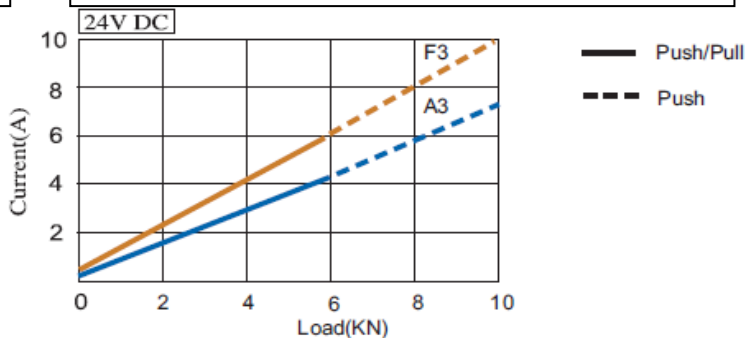

STANDARD DIMENSIONS

Stroke (mm)	50	100	150	200	250	300	350	400
Retracted length (mm)	260	310	360	410	460	510	560	610
Extended length (mm)	310	410	510	610	710	810	910	1010

