



## TECHNICAL SPECIFICATIONS

Motor type	24 Volts DC or 12 Volts DC
Maximum strength	800 N in push / 800 N in pull
Strokes	standard or tailor-made
Speed	maximum 18 mm / sec. unloaded
Protection grade	IP42
Operating temperatures	+5° to +40°
Duty cycle	10% (2 mn operation / 18 mn rest)
Inner / outer tube material	Aluminium
Colour	black


### Options :

Fixing type	various models with or without clevis
Protection grade	IP54

## PERFORMANCES


### Speed / Load

12V DC

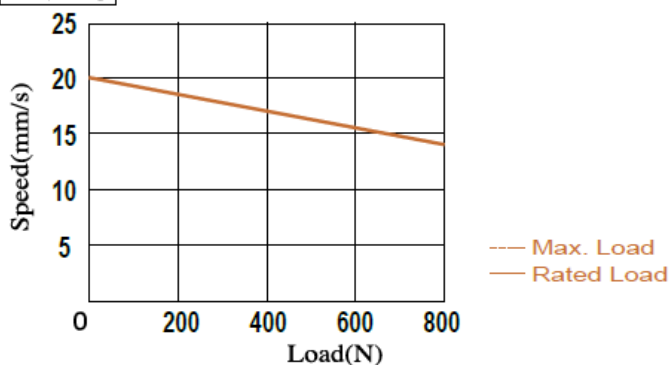

### Current / Load

12V DC

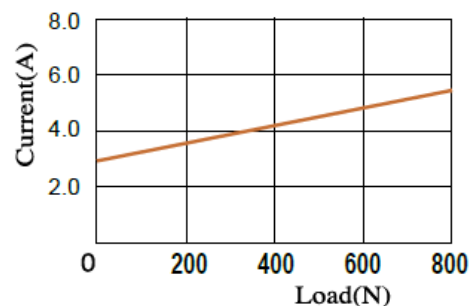

## STANDARD DIMENSIONS

Stroke (mm)	50	100	150	200	250	300	350
Retracted length (mm)	306	356	406	456	506	556	606
Extended length (mm)	356	456	556	656	756	856	956

