

Linear actuator V60




TEHCNICAL SPECIFICATIONS

Motor type	24 Volts DC or 12 Volts DC
Maximum strength	6000 N in push / 4000 N in pull
Strokes	standard or tailor-made
Speed	standard : 6 mm / sec. under 6000 N
Protection grade	IP54
Tubes material	Aluminium
Operation temperatures	+5° to +40°
Duty cycle	10% (2 mn operation / 18 mn rest)
Colour	RAL 7035 (light grey)

Options :

Emergency lowering function	mechanical release QR or MR
Protection grade	IP65 / IP66
Mechanical safety	-Push Only -safety nut
Fixing type	various models with or without clevis
Direction of fixing clevis	0°/ 30°/ 60° or 90°
Synchronisation / Memory function	with hall effect sensors

PERFORMANCES

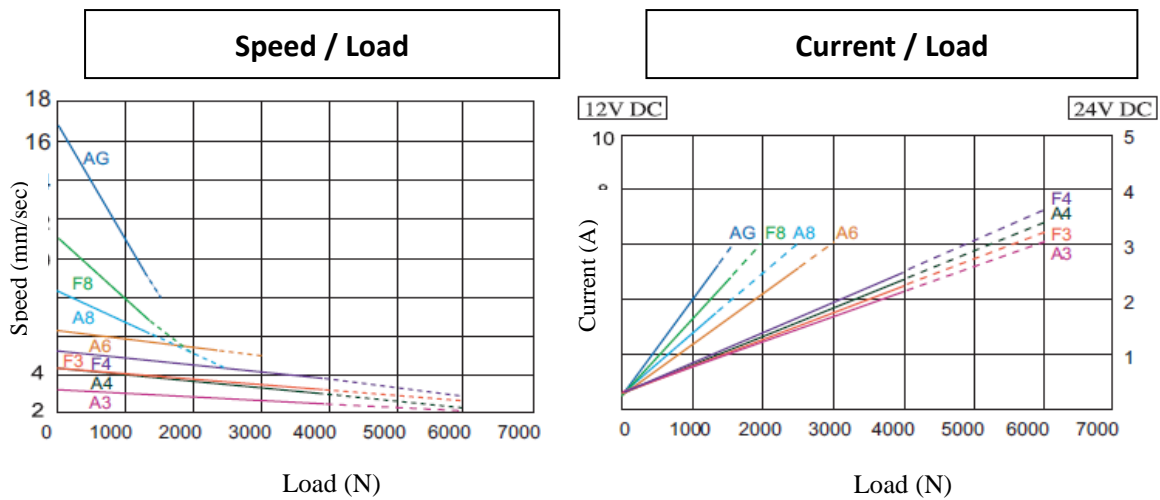

STANDARD DIMENSIONS

Stroke (mm)	100	150	200	250	300	350	400
Retracted length (mm)	288	338	388	438	488	538	588
Extended length (mm)	388	488	588	688	788	888	988
<u>With mechanical release version QR or MR:</u>							
Retracted length (mm)	330	380	430	480	530	580	630
Extended length (mm)	430	530	630	730	830	930	1030

