



TECHNICAL SPECIFICATIONS


Motor type	24 Volts DC or 12 Volts DC
Maximum strength	6000 N in Push / 4000 N in Pull
Strokes	from 35 mm to 130 mm (pitch 2mm)
Speed	maxi 11 mm/sec. unloaded
Protection grade	IP43
Operating temperatures	+5° to +40°
Duty cycle	10% (2 mn operation / 18 mn rest)
Colour	black

Options :


Fixing type	various models available with or without clevis
Mechanical safety	Push Only
Synchronisation / memory function	with hall effect sensors

PERFORMANCES

Speed / Load

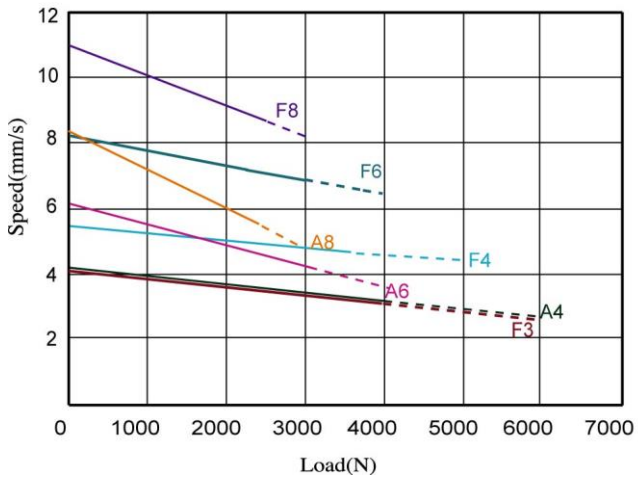

Current / Load

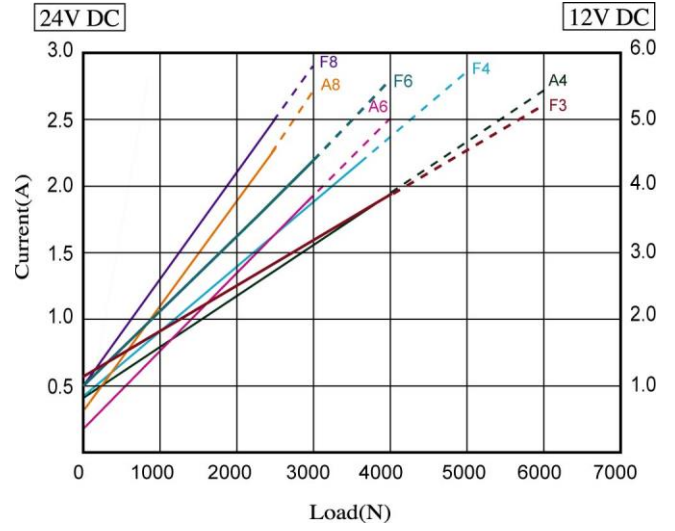

STANDARD DIMENSIONS

