




## TECHNICAL SPECIFICATIONS

Master actuator	built-in transformer and control board
Motor type	24 Volts DC
Maximum strength	8000 N in push / 6000 N in pull
Strokes	standard or tailor-made
Speed	standard : 6 mm / sec. under 8000 N
Protection grade	IP54
Operating temperatures	+5° to +40°
Duty cycle	10% (2 mn operation / 18 mn rest)
Colour	RAL 7035 (light grey)

### Options :

Control of slave actuators	1 to 2 (V20 / V60 / V80E, etc.)
Speed	maximum 16.5 mm / sec. unloaded
Emergency lowering function	by 2 x batteries 9V
Protection grade	IP65 / IP66
Mechanical safety	-Push Only -safety nut
Fixing type	various models with or without clevis
Direction of fixing clevis	0° or 90°

## PERFORMANCES

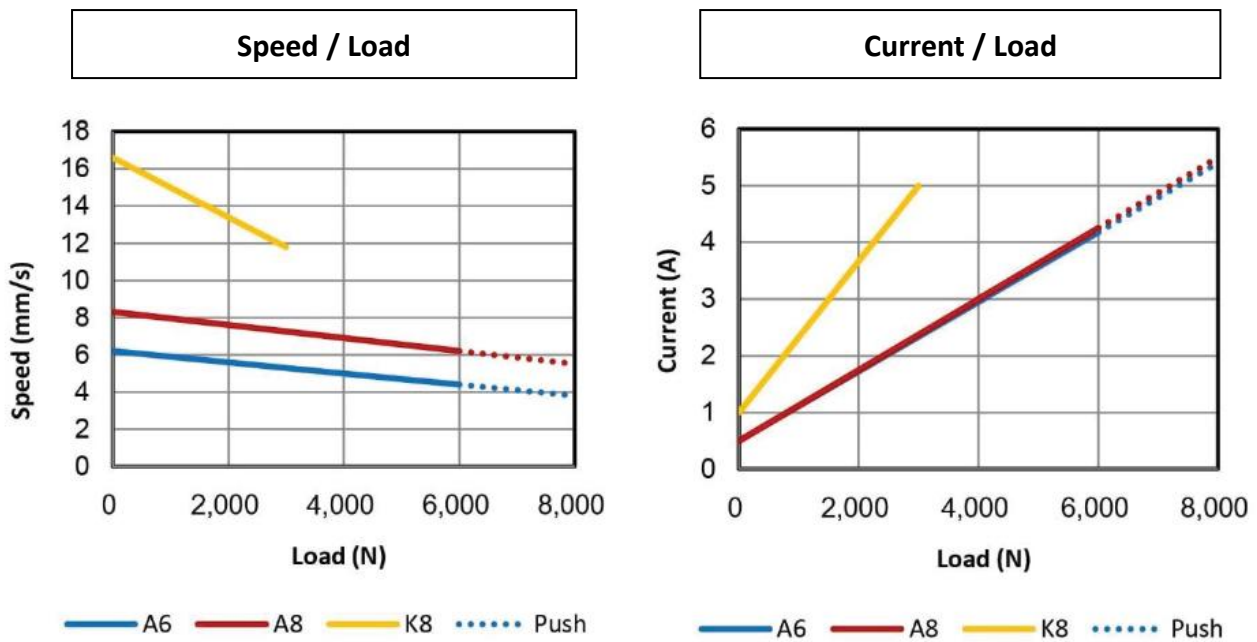

## STANDARD DIMENSIONS

Stroke (mm)	100	150	200	250	300	350	400
Retracted length (mm)	310	360	410	460	510	560	610
Extended length (mm)	410	510	610	710	810	910	1010

