




Schematic Diagram

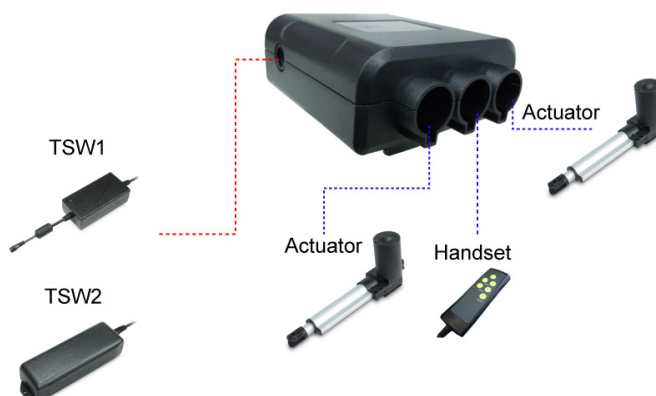

TECHNICAL SPECIFICATIONS

Input voltage	29 VDC (from Switch Mode Power Supply SMPS)
Output voltage	29 VDC
Power / current	maximum 3 A at 29 VDC
Over-current protection	3 A per actuator output
Actuator connections	from 1 to 2
Control connections	1
Protection grade	IP42
Fixing type	fit to main actuator
Duty cycle	10% (2 mn operation / 18 mn rest)
Colour	black (RAL 7001)

Options :

Fixing type	plate with screws for fixing on frame
Emergency lowering function	by 2 x 9V batteries inside SMPS type TES2

DIMENSIONS

