



TECHNICAL SPECIFICATIONS


Motor type	24 Volts DC or 12 Volts DC
Maximum strength	2000 N in push / 2000 N in pull
Strokes	standard or tailor-made
Speed	up to 33 mm/sec. unloaded
Protection grade	IP42
Inner tube material	Aluminium
Operation temperatures	+5° to +40°
Duty cycle	10% (2 mn operation / 18 mn rest)
Colour	black

Options :


Fixing type	various models available with or without clevis
Mechanical safety	Push Only
Synchronisation / memory function	with hall effect sensors

PERFORMANCES

Speed / Load

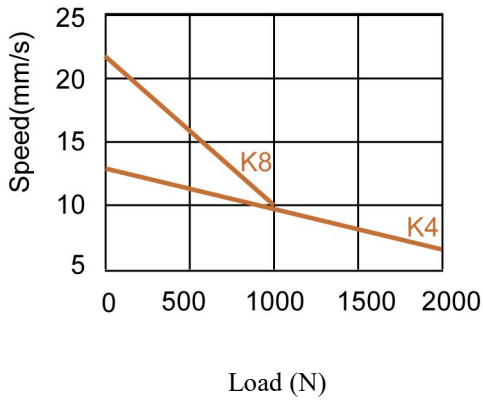

Current / Load

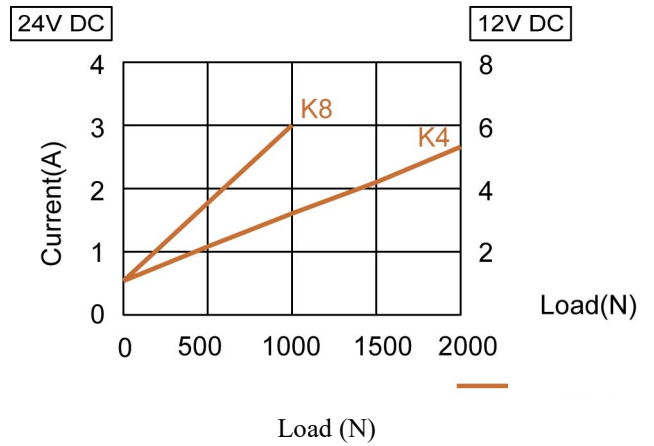

STANDARD DIMENSIONS

Stroke (S)	30 mm	50 mm	100 mm	150 mm	200 mm	250 mm	300 mm
Retracted length (A)	160 mm	180 mm	230 mm	280 mm	330 mm	380 mm	430 mm
Extended length (B)	190 mm	230 mm	330 mm	430 mm	530 mm	630 mm	730 mm

