

TECHNICAL SPECIFICATIONS


Motor type	24 Volts DC or 12 Volts DC
Protection grade	IP42
Maximum strength	2000 N in Push / 2000 N in Pull
Strokes	adjustable limit switches by CAM system
Retracted length	minimum 132mm (with standard nut)
Speed	maxi 44 mm/sec
Tube material	Aluminium profile square shape 30 x 30 mm
Colour	black
Duty cycle	10% (2 mn operation / 18 mn rest)
Operating temperatures	+5° to +40°

Options :

Synchronisation / Memory function	with hall effect sensors
Tailor-made retracted length	with customized translation nut


PERFORMANCES

Speed / Load

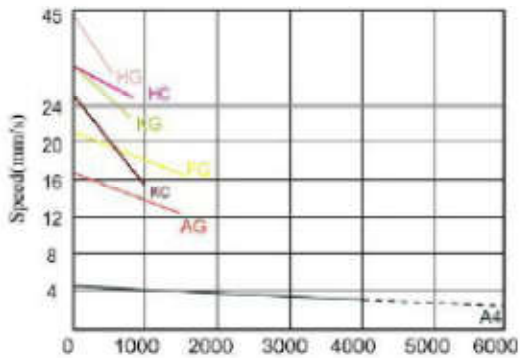

Load (N)

Current / Load

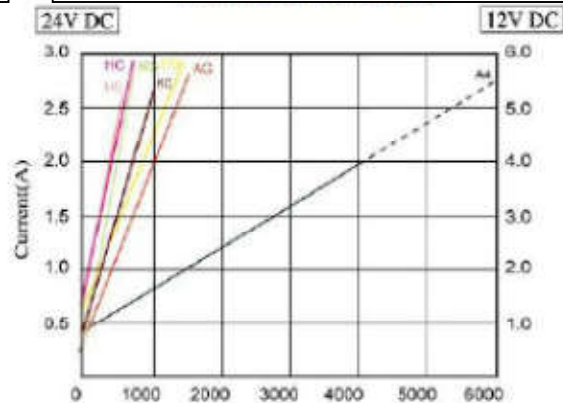

Load (N)

STANDARD DIMENSIONS

