



## TECHNICAL SPECIFICATIONS


Motor type	24 Volts DC or 12 Volts DC
Protection grade	IP54
Maximum strength	3500 N in push / 2000 N in pull
Strokes	standard or tailor-made
Speed	maximum 11.4 mm / sec. unloaded
Operating temperatures	+5° to +40°
Duty cycle	10% (2 mn operation / 18 mn rest)
Compatibility	control boxes TB / TSE / TST / TSW / CBP / NOVOMAT
Colour	black

### Options :


Protection grade	IP66
Mechanical safety	Push Only
Fixing type	various models available with or without clevis

## PERFORMANCES

### Speed / Load

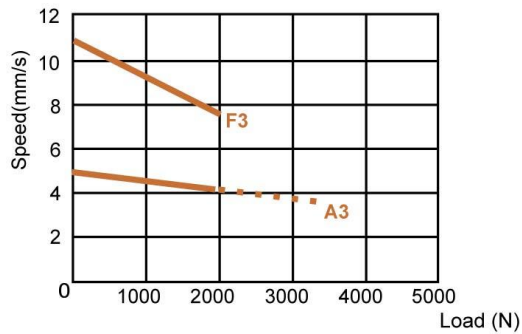

### Current / Load

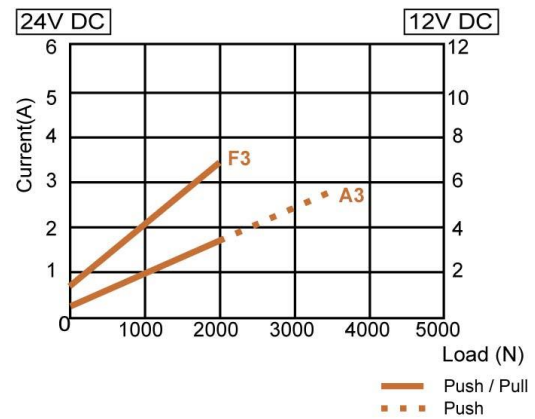

## STANDARD DIMENSIONS

Stroke (mm)	100	150	200	250	300	350	400	450	500	550	600
Retracted length (mm)	241	291	341	391	441	510	560	610	660	710	760
Extended length (mm)	341	441	541	641	741	860	960	1060	1160	1260	1360

