



TECHNICAL SPECIFICATIONS


Motor type	24 V DC or 12 V DC
Drive screw	Ball screw
Push capability	7 000 N maxi
Pull capability	7 000 N maxi
Static load capability	13 600 N maxi
Gear ratio	10:1 / 20:1 / 30:1 / 40:1
Current consumption loaded	maximum 17.6A @ 12 VDC
Speed	maximum 33.5 mm/sec. unloaded
Stroke	standard or customized
Electrical stroke end	adjustable limit switches
Compatibility	control boxes BCI / BCI1 / BCI2 / BCI3
Sealing protection	IP54
Duty cycle	25% (4 mn operation / 12 mn rest)
Colour	Black

Options :


Sealing protection	IP65
Output power cord	side position

PERFORMANCES

Speed / Load

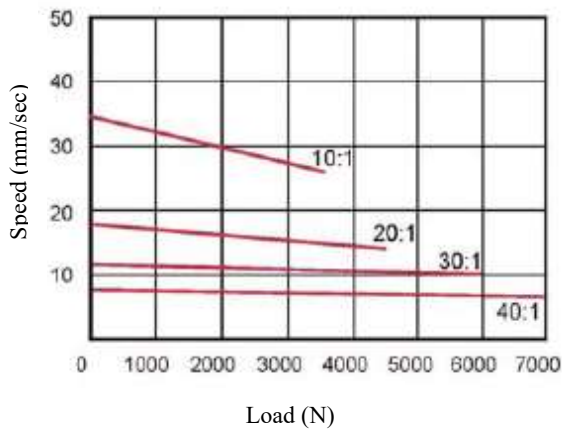

Current / Load

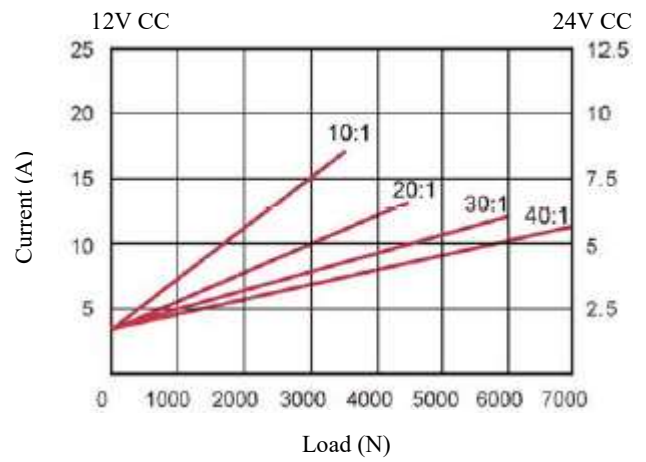

DIMENSIONS

Stroke (mm)	102	153	203	254	305	457	610
Retracted length A (mm)	359	410	461	512	640	792	945
Extended length (mm)	461	563	664	766	945	1249	1555

